



Glue-fumes extractor

GEOVENT Glue-fumes extractor used for the removal of toxic fumes in gluing of windscreen and sunroofs. The Glue-fumes extractor is available with a range of 2-7 m and are available for wall or ceiling mounting.

You can connect the glue-fumes extractor to a central extraction system.

GEOVENT Glue-fumes extractor with internal carrying arms has a range of reach of 2-7 m. Three stable, self-adjusting links secure the Glue-fumes extractor in the required position.

The GEOFLEX P2A1000 is a lightweight PVC hose, which is very suitable for fumes of most glue products.

Temperature range -30° to +80° C.

Recommended airflow volume: 1000-2000 m³/h




Panel fume extractor




Extraction hood for windscreen gluing

Ordering table for Glue-fumes extractor	
Art. No.	Description
01-202	Wing arm ø160mm, 2 m – with quick-coupling/ball joint - w/o hood
01-202A	Wing arm ø200mm, 2m – with quick-coupling/ball joint - w/o hood
01-200	Wing arm ø160mm, 3 m – with quick-coupling/ball joint - w/o hood
01-200A	Wing arm ø200mm, 3m – with quick-coupling/ball joint - w/o hood
12-243	Extraction hood for windscreen gluing 850x600 mm of polycarbonate with quick-coupling ø160
12-243A	Extraction hood for windscreen gluing 850x600 mm of polycarbonate with quick-coupling ø160
12-242	Panel fume extractor ø160x1300 mm of aluminum with quick-coupling
10-247	Detachable welding hood ø160/385 for quick-coupling uncoupling - with 25 mm suction edge
10-248	Detachable welding hood ø200/385 for quick-coupling uncoupling – with 25 mm suction edge

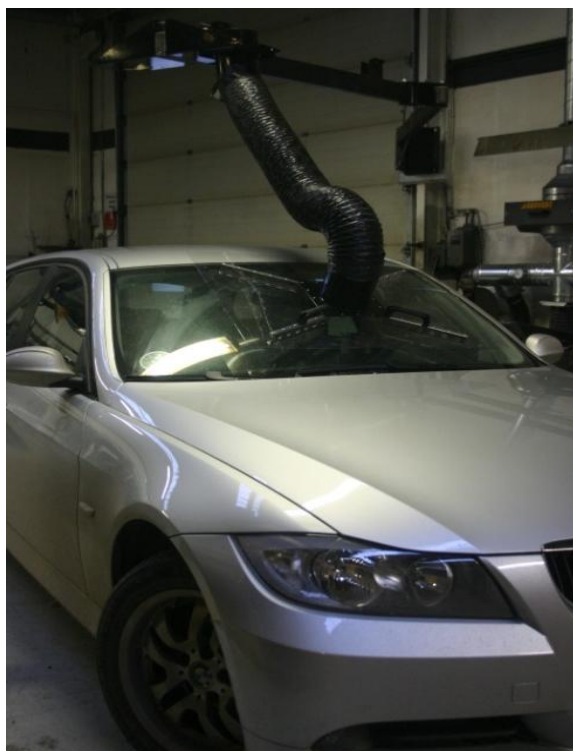

Extraction hood for windscreen gluing in use

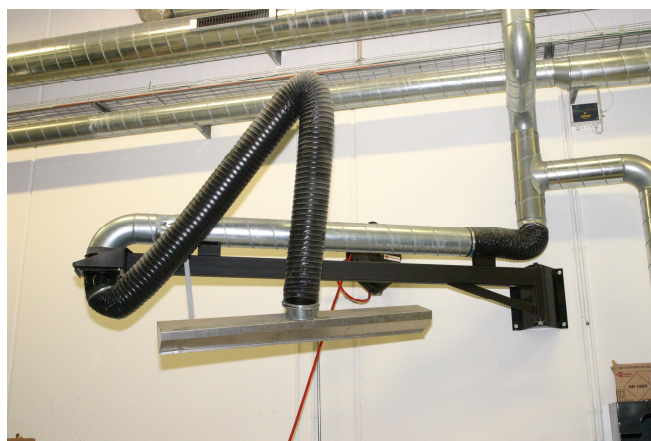

Panel fume extractor – mounted with wall bracket and connection



Wall Console



Workshop Environment with Panel fume extractor



Workshop Environment with Panel fume extractor

Accessories for Glue-fumes extractor	
Art. No.	Description
01-540	Wall Console \varnothing 160 mm, 260 mm from wall
01-541	Wall Console \varnothing 200 mm, 280 mm from wall
91-289A	Quick-coupling \varnothing 160
91-290A	Quick-coupling \varnothing 200