

Hose Reel FB

5m Ø80 - 10m Ø150

Hose reel type FB is a budget version of the original GEOVENT hose reel type F. The hose reel FB is based on the same transmission system as the type F, however it is more simple construction. The hose reel is suitable for extracting exhaust gasses, welding fumes, grinding dust etc. The inlet (Ø160 mm) of the hose reel can be connected directly to a MSF 200 fan or can be connected to a central system. The hose reel are available with or without hose. For choosing the right nozzle - please refer to the appropriate data sheets.

2

Effective spot extraction

Geovent FB Hose Reel



Construction

Galvanized parts: Bracket, barrel, hose guide, end cover for spring, all nuts and bolts.

Epoxy painted parts: Inlet and end covers for barrel.

Bearings



Inlet side: PEHD bearing art.no. 04-138.

Spring side: Ball bearing YAR 205 2F art.no. 91-260.

Hose: Exhaust hose with nylon spiral. The hose can be overrun to a certain extent. Temperature range up to 150°C - temporary to 170°C.

Upwinding capacity: Max. Hose weight including nozzle = 15.0 kg.

Ordering table for Hose reel FB	
Art.no.	Model
Hose Reel FB Without Hose & Nozzle	
04-571	Hose Reel 450FB
04-558	Hose Reel 750FB
04-559	Hose Reel 950FB
Hose Reel FB With Hose, but Without Nozzle	
04-550	Hose Reel 450FB-05-080
04-580	Hose Reel 750FB-07-080
04-551	Hose Reel 750FB-10-080
04-552	Hose Reel 750FB-05-100
04-581	Hose Reel 750FB-07-100
04-553	Hose Reel 950FB-10-100
04-554	Hose Reel 750FB-05-125
04-582	Hose Reel 750FB-07-125
04-555	Hose Reel 950FB-10-125
04-556	Hose Reel 750FB-05-150
04-583	Hose Reel 750FB-07-150
04-557	Hose Reel 950FB-10-150

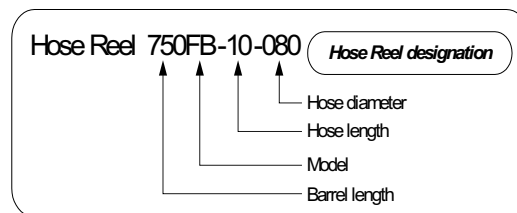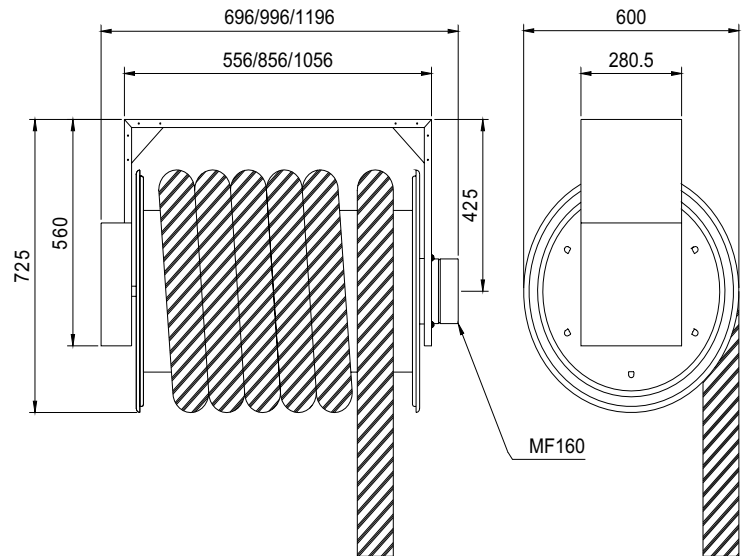

GEOVENT

Brevo B.V.
 Dokwerkerstraat 3
 2984 BJ Ridderkerk
 Telefoon 0180-417344, Fax 0180-411563
 Email : info@brevo.nl, Web : www.puntafzuiging.nl



March 2001

Hose Reel LX

LXM/LXH 5m ø80 - 10m ø150

The Geovent Hose Reel, type LX, is used for the extraction of exhaust gas, welding smoke, etc. The clear advantages of this principle are that an extraction hose is always available and rolled out hoses are not making a mess on the floor. The Hose Reel, type LX, is supplied with a wireless control - for improved operating comfort. The restrictive requirements to a nice working environment in the workshop request the use of spot extraction. For this purpose, Hose Reel, type LX, makes the optimum choice.

2

Effective spot extraction

Geovent Hose Reel LX with wireless control





Hose Reel LX is a sturdy, however still light construction, consisting of galvanised and powder enamelled parts, which secure a long service life. A PEHD slide bearing and a spherical ball bearing warrant trouble-free and easy operation.

The Geovent Hose Reel is practically maintenance-free. However, the various moving parts have to be controlled for wear and correct mounting regularly.

The Geovent Hose Reel, type LX is supplied complete, mounted with selected hose, suction branch and wireless control (remote control with cable is available as accessory), ready for installation on the wall or in the ceiling. Geovent recommend ceiling installation, since a larger degree of freedom and easier operation are obtained in the daily work.

Measurement table for Hose Reel LX

Mål i mm	750LX	950LX
A	1100	1300
B	890	1090
C	820	1020
D	500	500
E	532	532
F	ø160 Muffe	ø160 Muffe
Height: ø80/100/125/152	725/725/748/755	725/725/748/755
Height to connect F	425	425

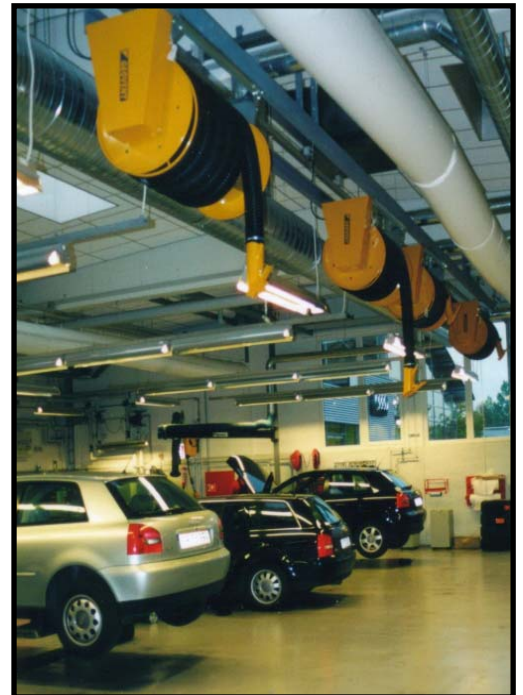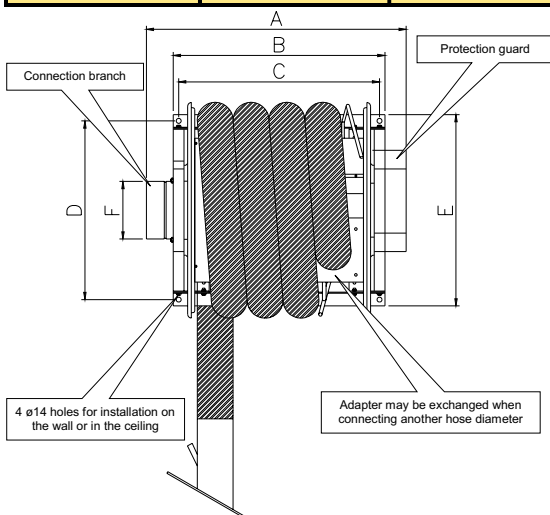

Geovent Hose Reels LX, installed in the ceiling of a garage

GEOVENT

Brevo B.V.
Dokwerkerstraat 3
2984 BJ Ridderkerk
Telefoon 0180-417344, Fax 0180-411563
Email : info@brevo.nl, Web : www.puntafzuiging.nl



