Breathe In...

Hood Positioning D vice (HPD): Telescopic Extraction Arm







Hood Positioning D vice (HPD): Telescopic Extraction Ar



A flexible, self supporting extraction arm, engineered to carry a range of hood and hose combinations.

- Twin supports allow simple fixing of xible hose in various diameters
- Support clips allow the hose to be easily removed for cleaning & reinstallatio
- Increased surface area of all joints gives a lighter feel to the HPD, enabling easier positioning with the HPD sel supporting in its equired placement
- Rear mechanism is cased for improved safety and hygiene
- Boom at the rear provides the HPD with a 270 degree pivot, improving the working radius
- Integrated damper allows greater control of the airfl w in the extraction ystem
- ATEX compliant and Stainless
 Steel versions are available



Mounting Brackets:


- Standard Wall bracket
- Floor Stanchion
- Ceiling Bracket


Finish:

- Polyester Coated Black
- Texture Conducti e Black (ATEX)
- Stainless Steel

HPD Dimensions

| HPD | Length (mm) | A | В | С | D | Max Reach | Weight (Kg) | Load Capacity |
|-----------|-------------|-----|-----|------|-----|--------------|----------------|------------------|
| Retracted | 1200 | 175 | 175 | 825 | 375 | 1550 | 13 | 3 |
| Extended | 1650 | 175 | 175 | 1225 | 375 | 1950 | 13 | 3 |

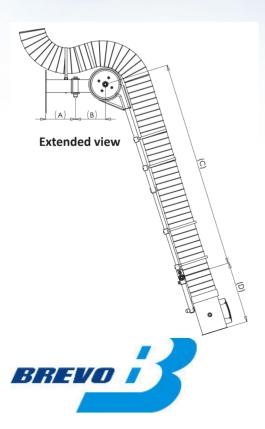





Brevo B.V. Dokwerkerstraat 3 2984 BJ Ridderkerk Telf.: 0180-417344 email: info@brevo.nl

