



GEOVENT

Mini arm

ø80 – ø100 – ø125

GEOVENT Mini arm is a handy point extraction arm for soldering smoke, fumes, oil fog, grinding dust a.s.o. The mini arm is supplied with a universal installation bracket, which can be mounted on either vertical (e.g. wall) or horizontal surfaces (e.g. table or lower cupboard). The hose (not included) is mounted on the outside of the arm. The arm has 5 friction joints, which result in smooth operation.

Construction:

Installation bracket: steel plate in powder enamel yellow RAL 1007. The plate is 360° turn able.

Hood: Light weight aluminum hood in ø80, 100, 125 powder enamel yellow RAL 1007.



Arms and friction joints: powder enamel 20x10 mm ALU profile, which is connected via friction discs and plate springs.

Capacity: Up to 900 m³/h depending on desired air speed.



Ordering table Mini arm	
Art. No.	Description
01-085	Mini arm 1.0 m without hood
Hoods for Mini arm	
06-121	Aluminum hood ø80 mm
06-122	Aluminum hood ø100 mm
06-123	Aluminum hood ø125

MINI arm with external bend able arm and hose	
Art. No.	Description
MINI-01	MINI arm 1.0 m ø80, complete
MINI-04	MINI arm 1.0 m ø80, complete including air tight damper
MINI-02	MINI arm 1.0 m ø100, complete
MINI-05	MINI arm 1.0 m ø100, complete including air tight damper
MINI-03	MINI arm 1.0 m ø125, complete
MINI-06	MINI arm 1.0 m ø125, complete including air tight damper

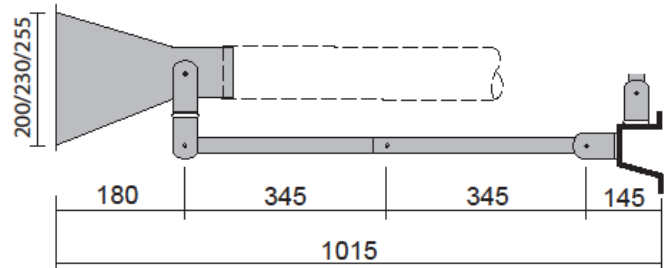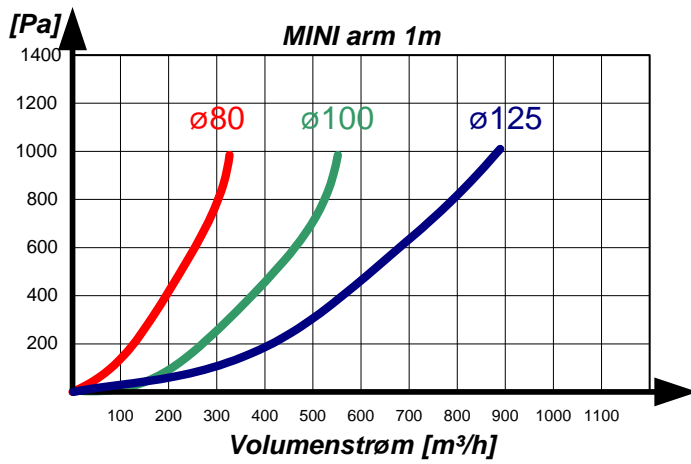

Accessories Mini arm

Art. No.	Description
06-121	Hood ø80 mm for MINI arm
06-122	Hood ø100 mm for MINI arm
06-123	Hood ø125 mm for MINI arm

